

120 W continuous program power capacity



1.4" horn throat diameter

44 mm (1.7 in) aluminium voice coil

Titanium diaphragm

1000 - 19000 Hz response

106.5 dB sensitivity

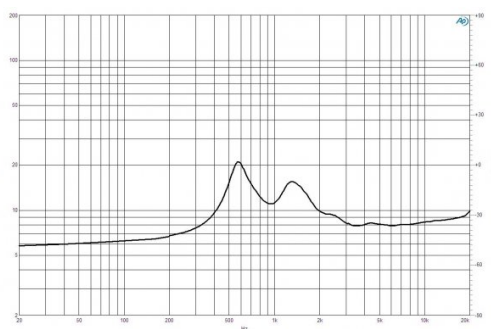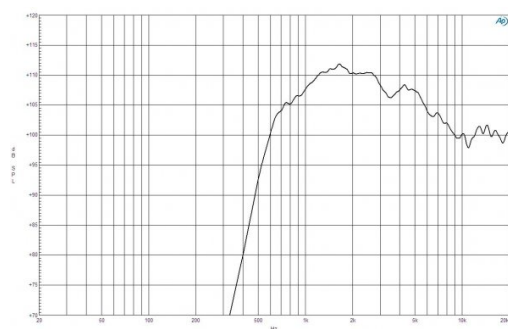

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	60 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	120 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	106.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1 kHz - 19 kHz
Recommended Crossover	1.5 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Titanium
Flux Density	1.85 T
Max Frequency Range	19 kHz
Min Frequency Range	1 kHz

SERVICE KITS

HF replacement-diaphragm	MMD5028M
--------------------------	----------

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Other details	4x M6 Mounting Studs with bolts and washers included
Overall Diameter	120 mm (4.7 in)
Depth	85 mm (3.3 in)
Net Weight	2.4 kg (5.3 lb)
Shipping Units	1 pcs
Shipping Weight	2.44 kg (5.39 lb)
Shipping Box	135x135x93 mm (5.31x5.31x3.66 in)